

Figure 1A

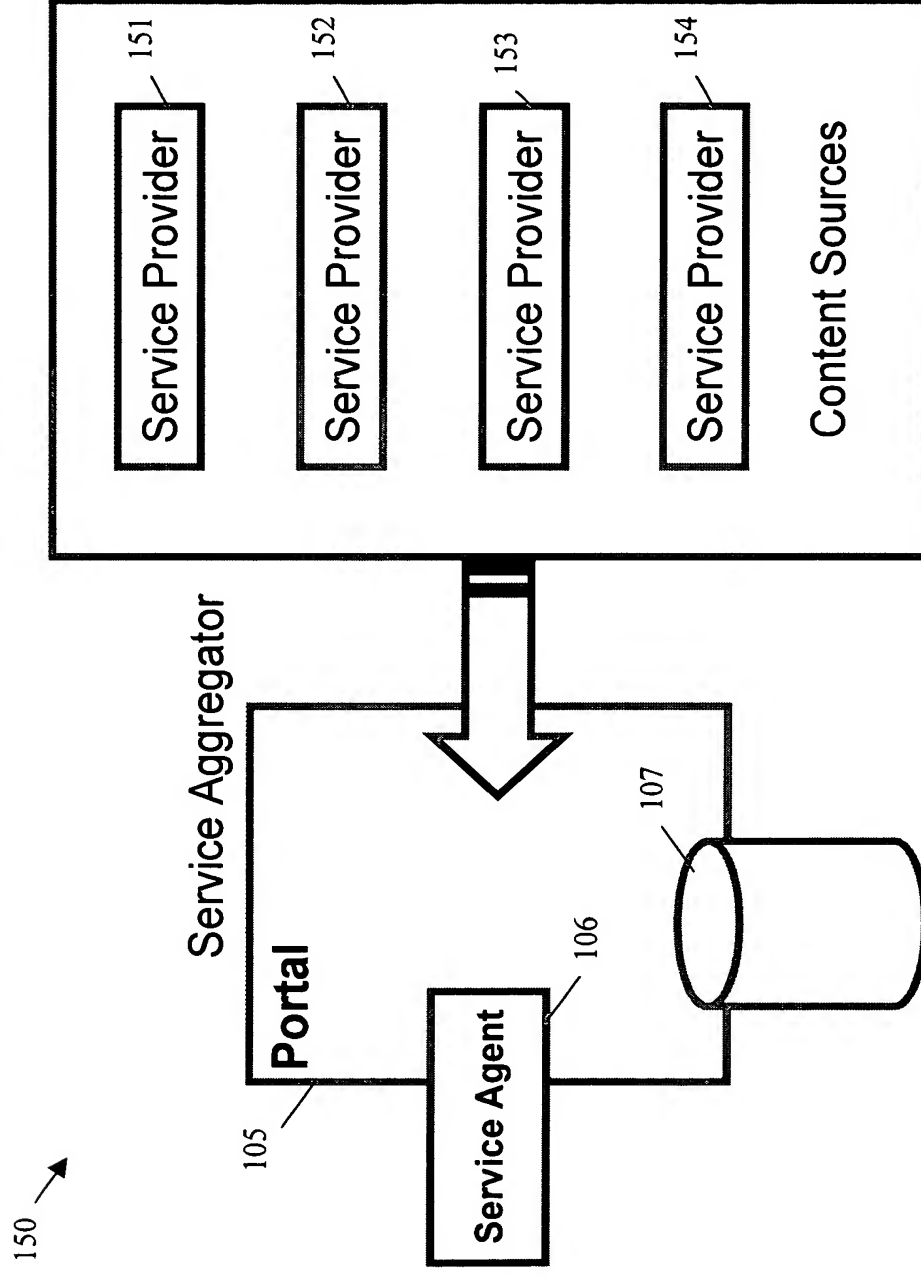


Figure 1B

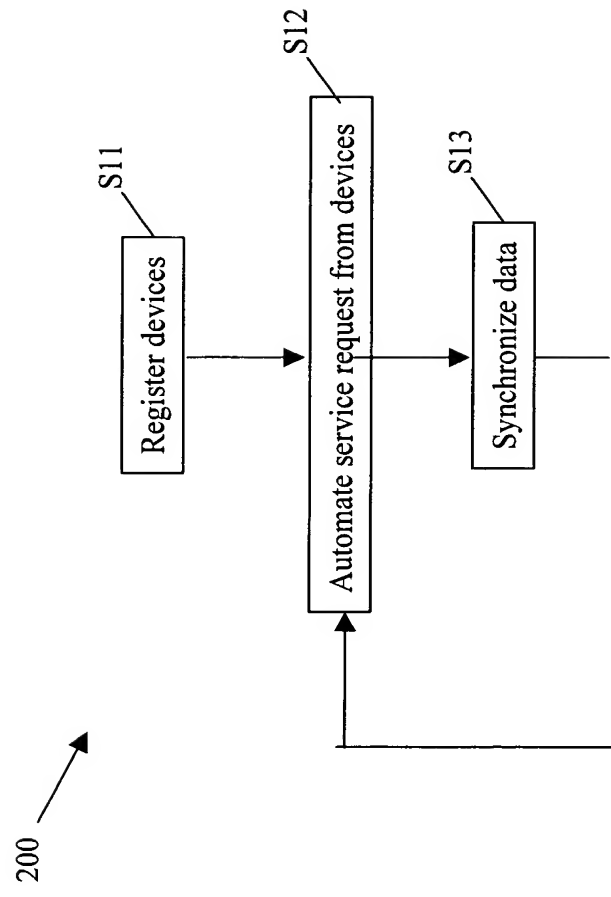


Figure 2A

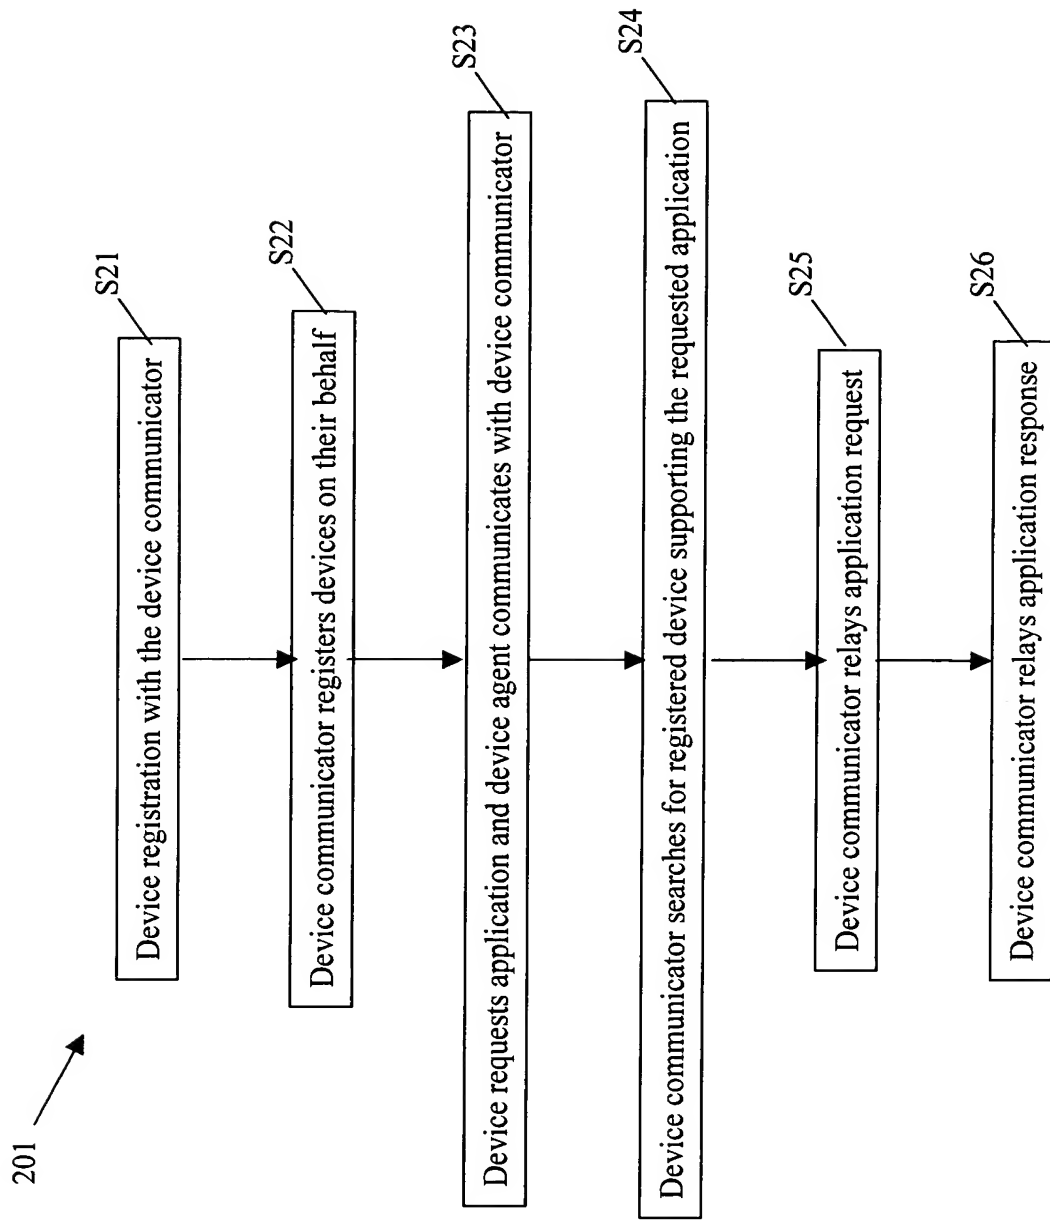


Figure 2B

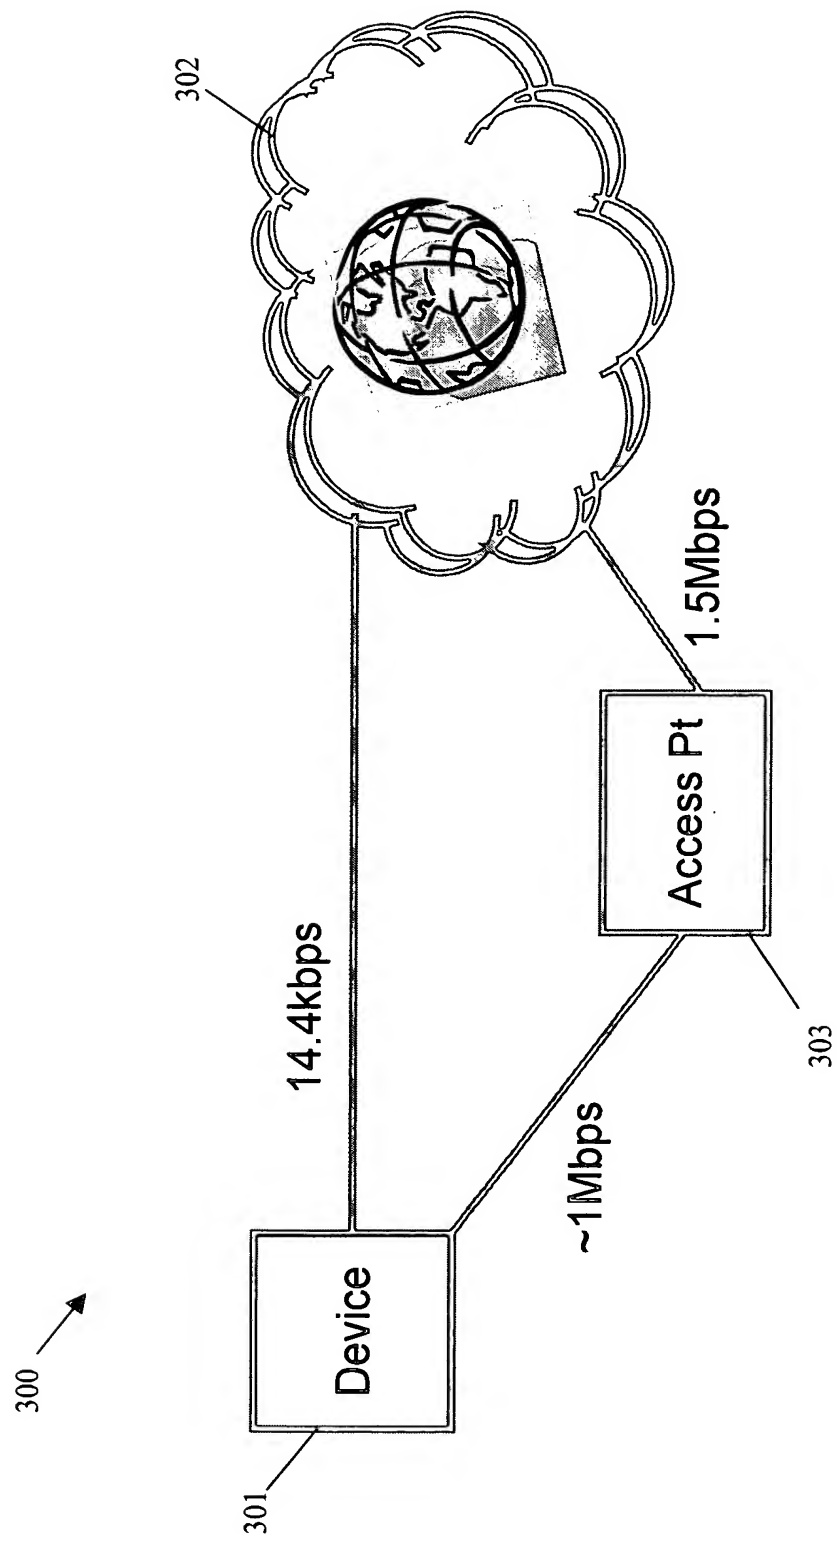


Figure 3

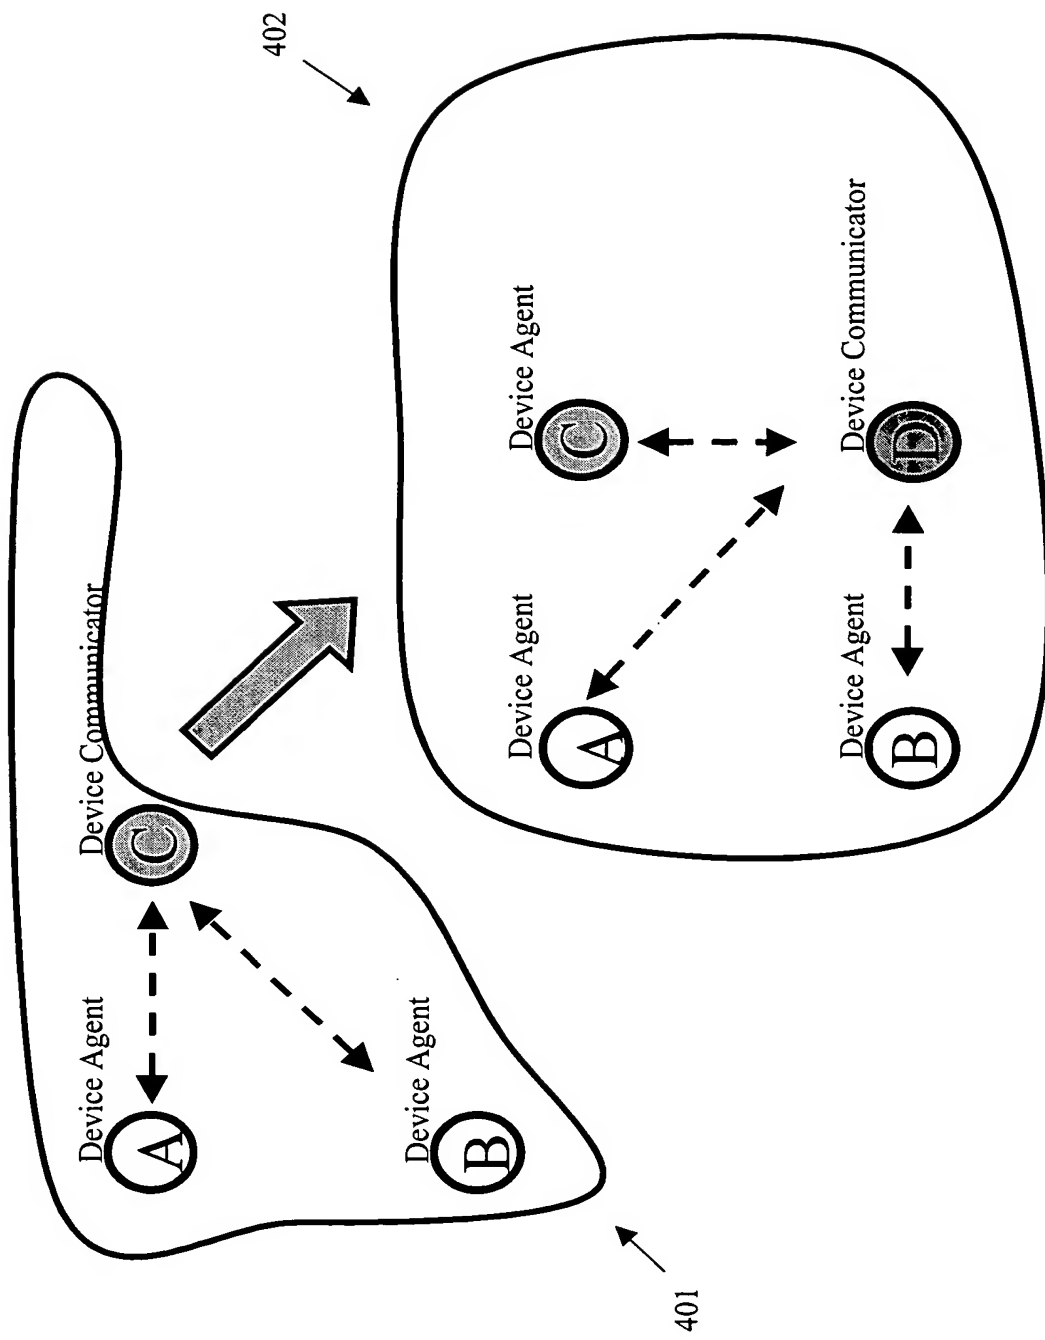


Figure 4

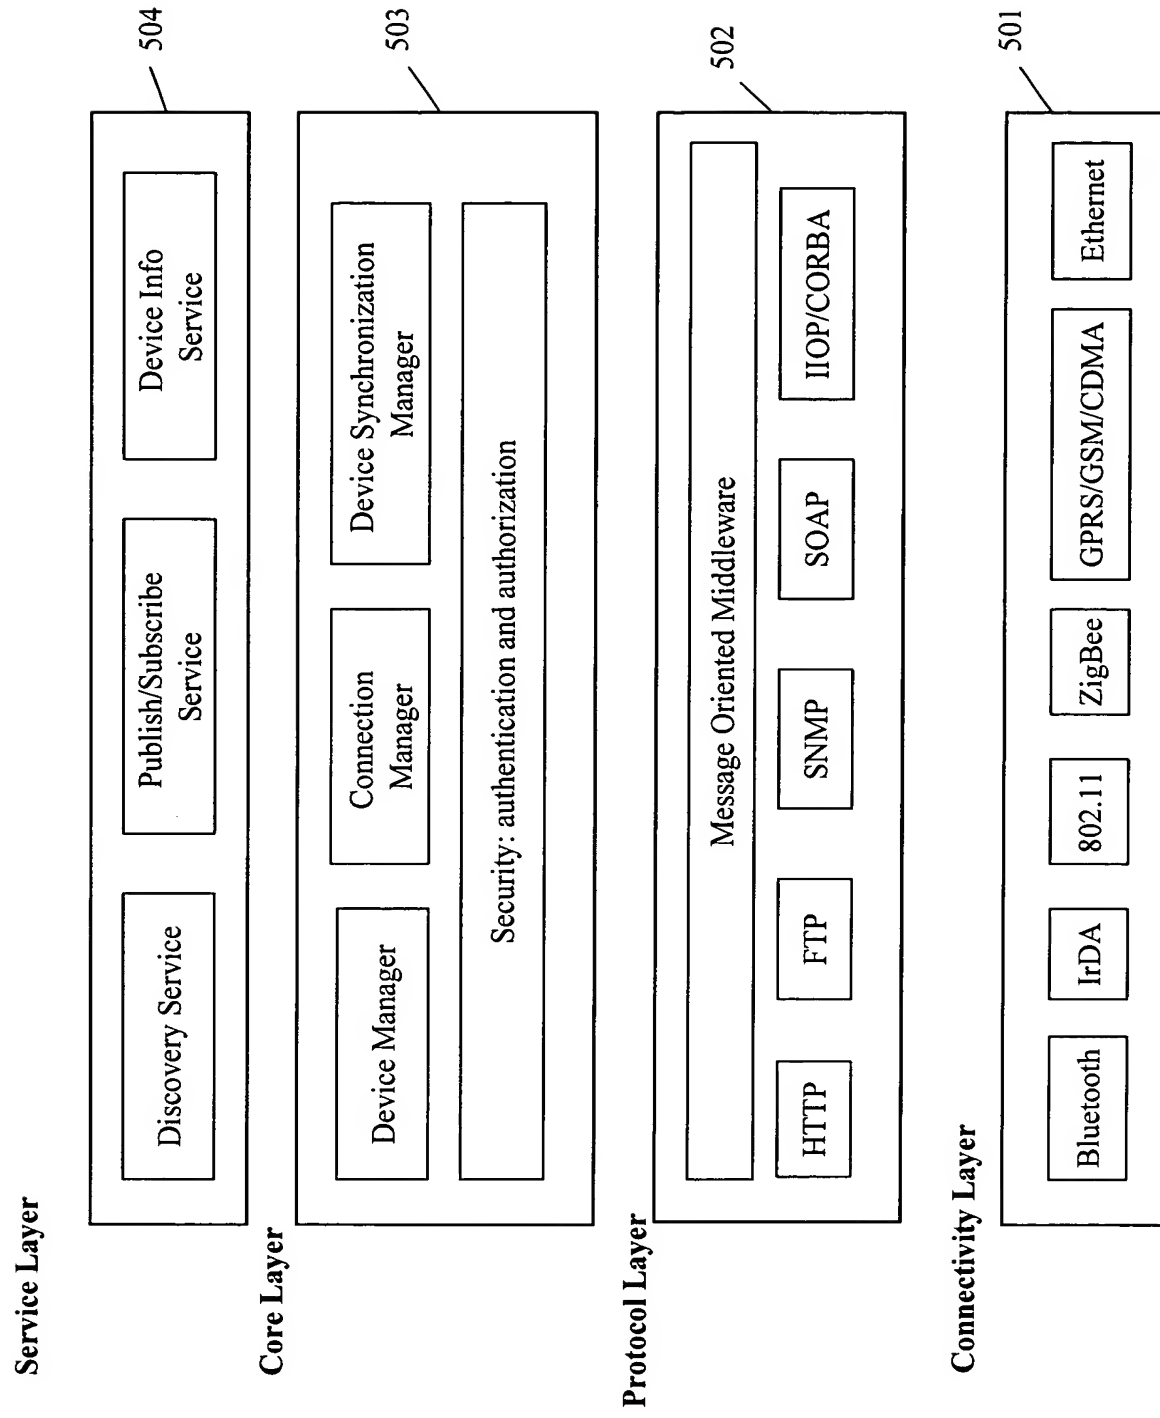


Figure 5

**Subscriber:**

- 1.Connect to the MoM server
- 2.Subscribe( <key>, <qos> )  
    // <key> contains the oid (object id), data type and other book-keeping info  
    // <qos> contains optional priority or login session information
- 3.Register a callback method
- 4....
- 5.Unsubscribe( <key> ) // not interested any more
- 6.Disconnect

**Publisher**

- 1.Connect to the MOM server
- 2.Publish( <message> ) // <message> = [<key>, <qos>, <data>]
- 3.Erase( <key> ) // erase any messages which has the same <key>
- 4.Disconnect

Figure 6



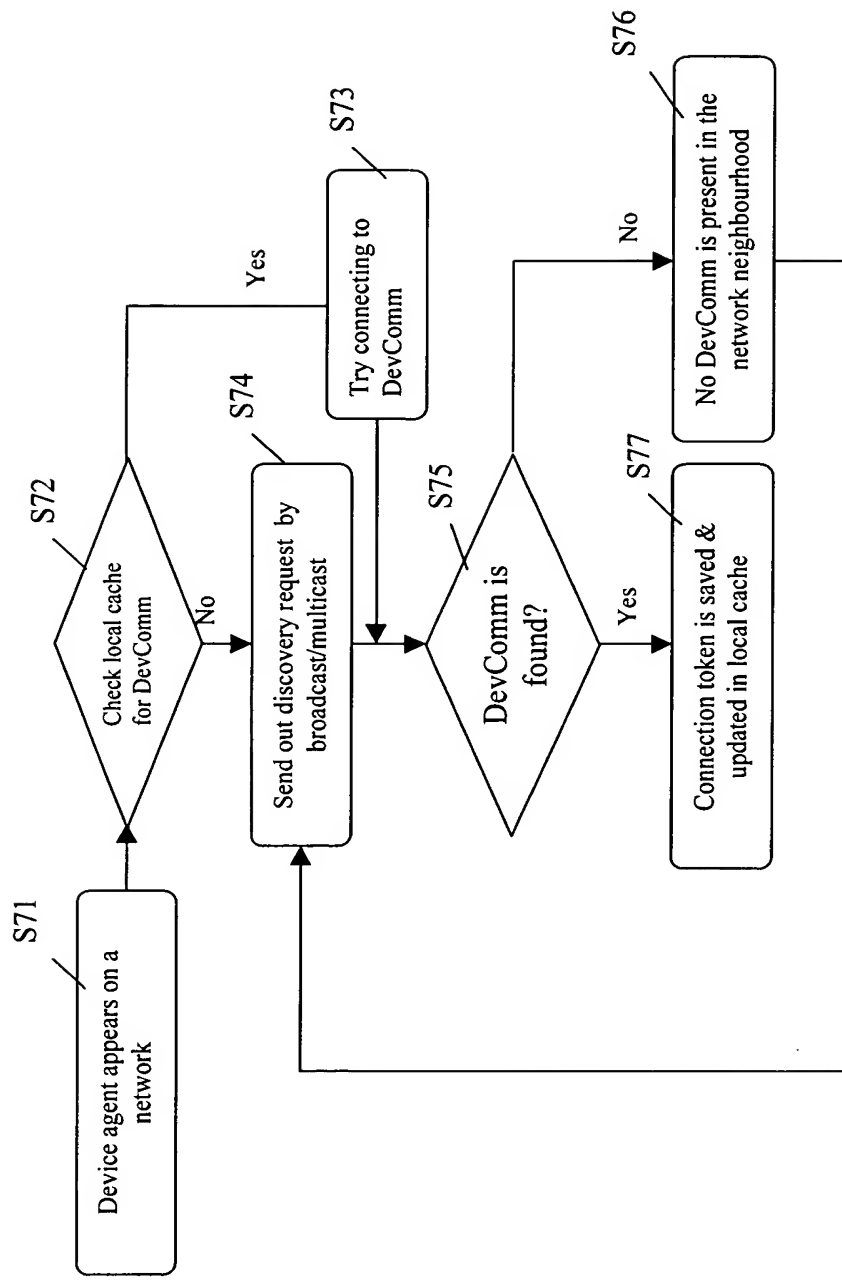


Figure 7

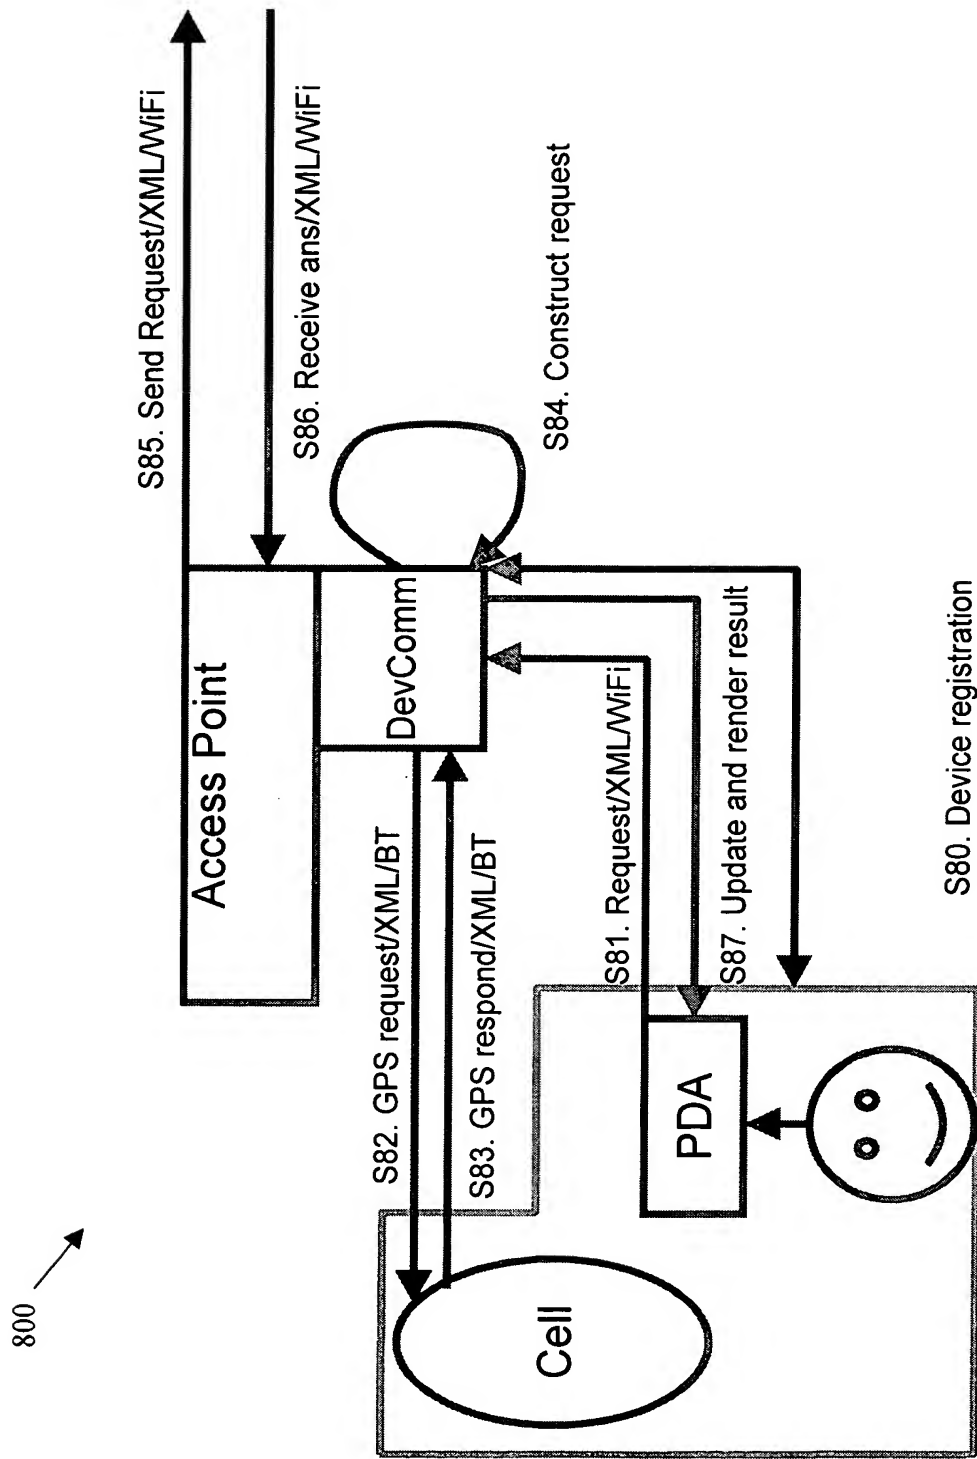


Figure 8

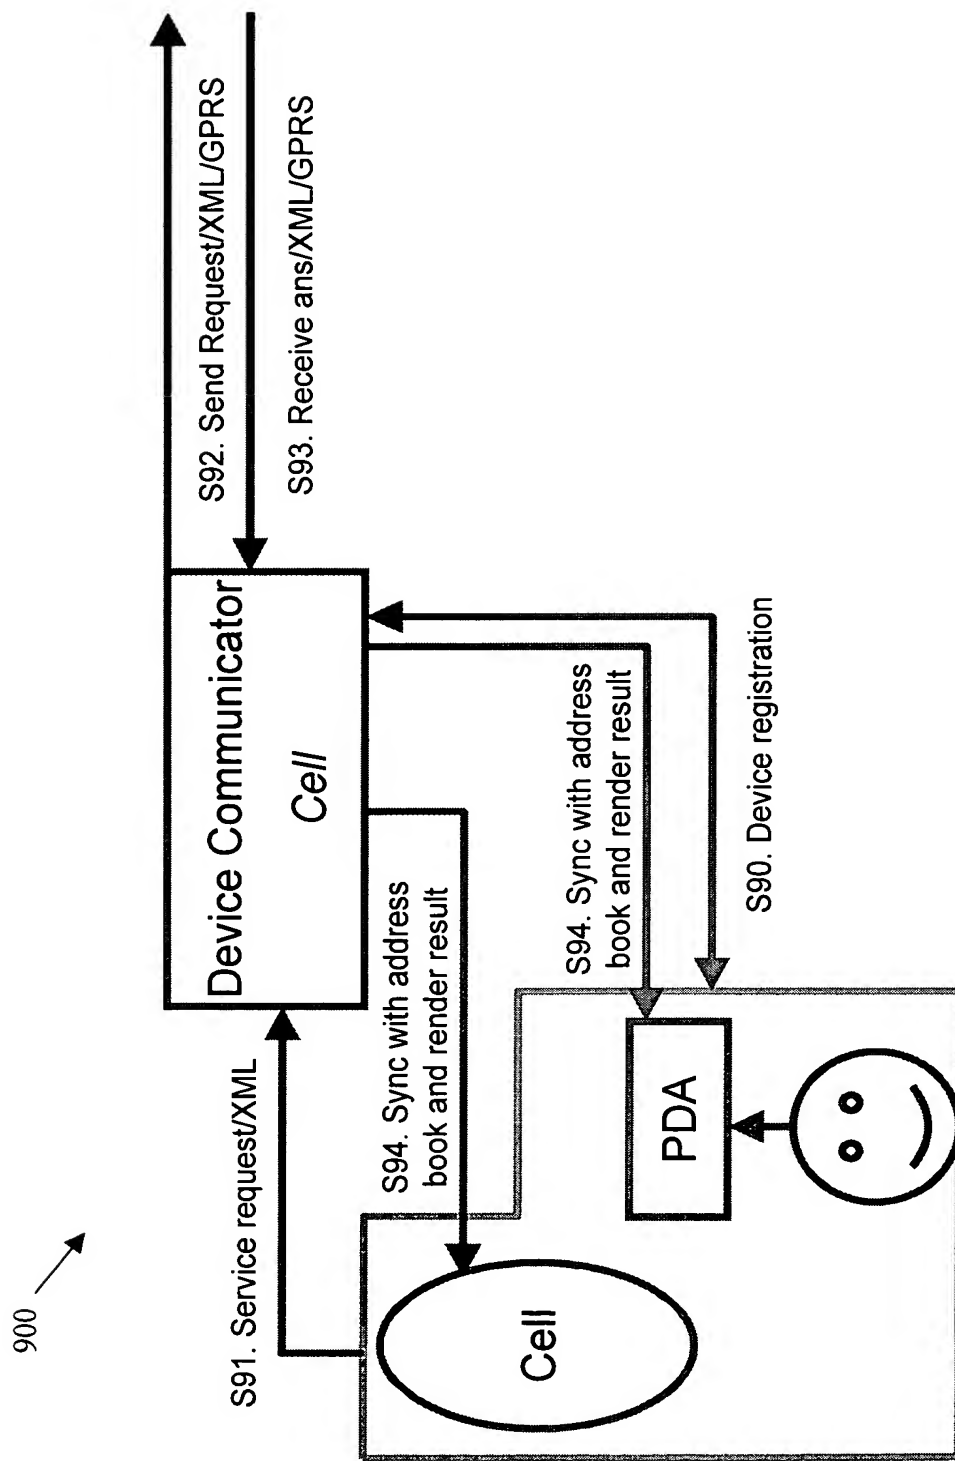


Figure 9

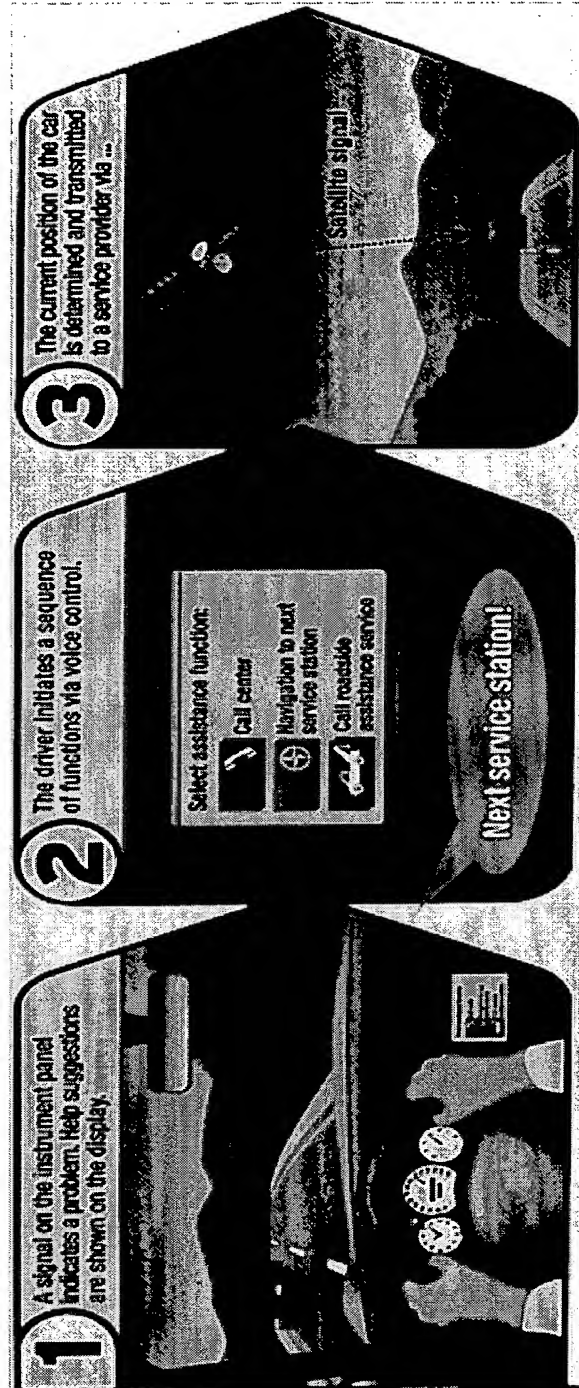


Figure 10a



Figure 10b

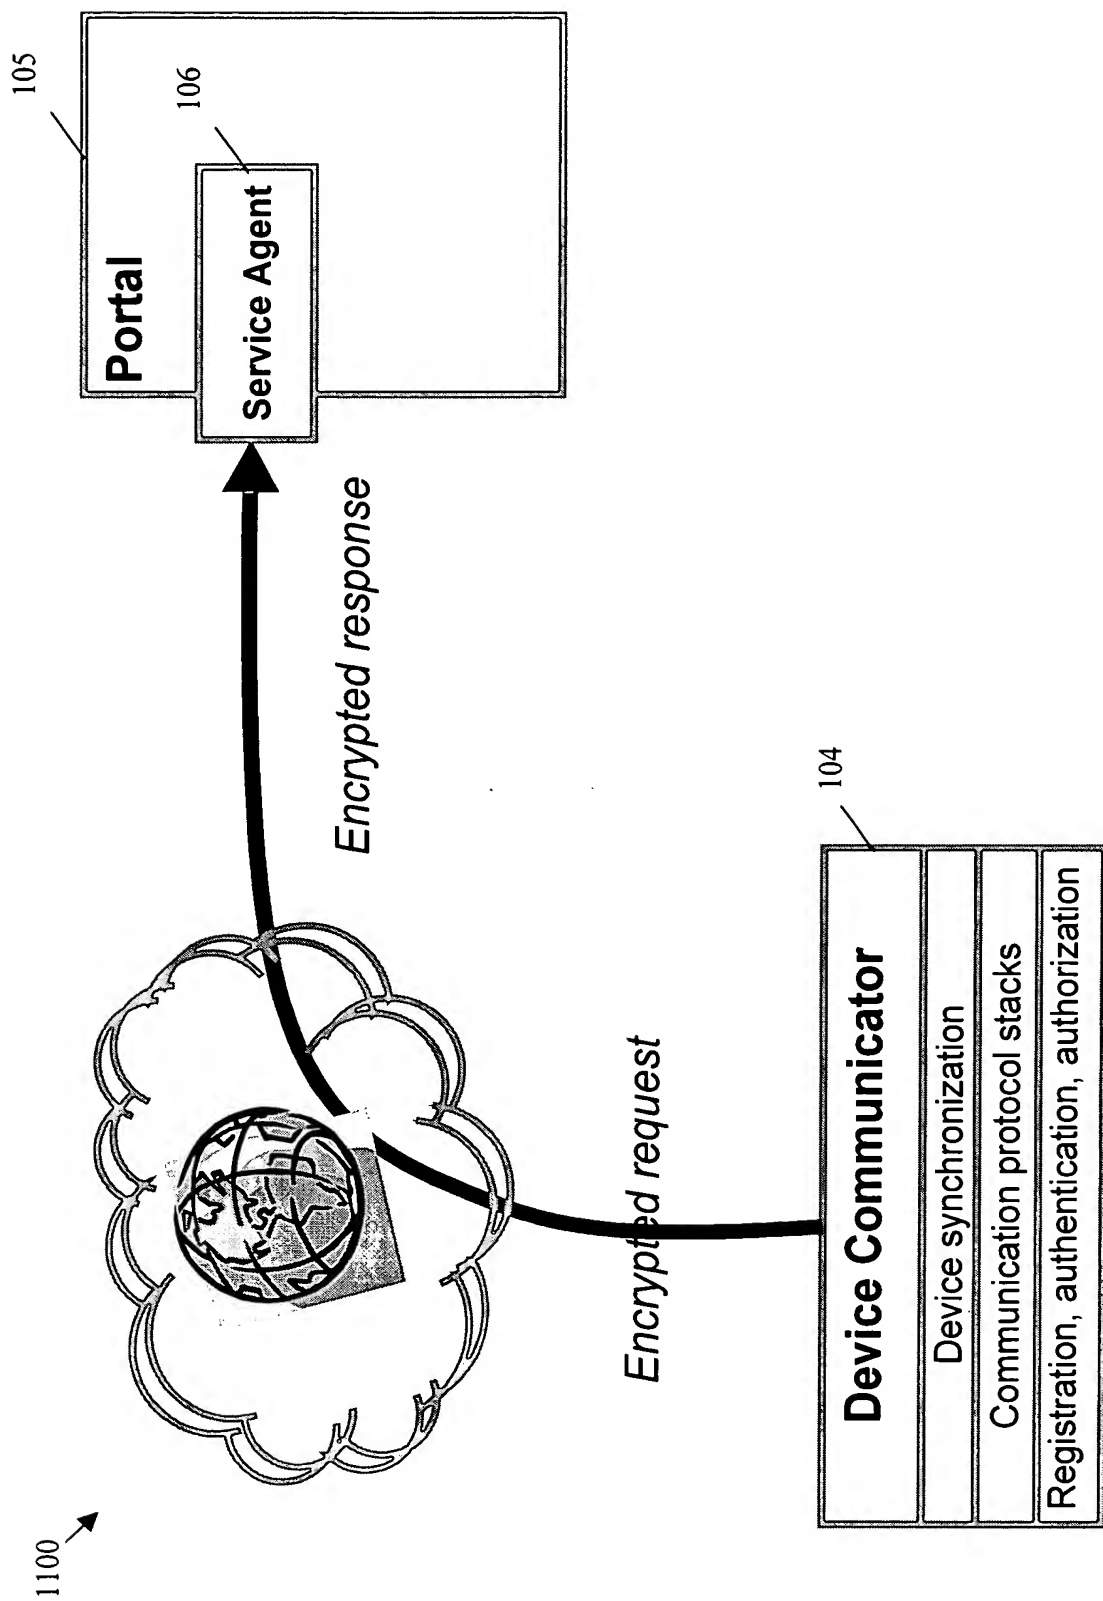


Figure 11